

PRIMA NM



... emergency.

USE

Non-maintained emergency luminaire for escape routes, available for use in high ambient temperature, $t_a = 50^\circ\text{C}$, is intended by its function and shape primarily for being in a set with PRIMA and NANOTTICA light fittings.


It is recommended for escape routes of interior industrial rooms, storage halls, sports premises, agricultural buildings and laboratories without hazard of explosion of gases, dusts and flammable vapours.

It is resistant to dust, moisture and spouting water. The body and the diffuser made of polycarbonate (PC) have increased resistance against deformation and impact.

Atmosphere emissions must be considered, as they may reduce the usability of plastics at installation in aggressive environment, see p. 367.

ADVANTAGES

- Light fitting protection **IP66**
- High thermal resistance ranging **from $t_a = 0^\circ\text{C}$ to $t_a = 50^\circ\text{C}$** also for basic Ni-Cd battery type
- LED module lifetime: 50 000 hours / L80B20
- Luminous flux of the light fitting: **440 lm**
- Diffuser: translucent polycarbonate (PC) = high mechanical resistance
- Body: grey polycarbonate (PC) = high mechanical resistance
- Emergency module **1h or 3h**
- Integrated diode for indication of correct operation
- Low energy consumption in StandBy mode


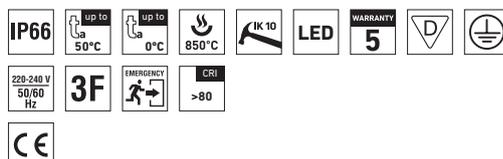


PRIMA PC, PCc



TECHNICAL DESCRIPTION

- Light fitting protection: **IP66**
- Maximum ambient temperature: **t_a = 50 °C**
- LED module lifetime: 50 000 hours / L80B20
- Luminous flux of the light fitting: **440 lm**
- Maximum light fitting efficiency: 133 lm/W
- **CRI > 80: 6500 K**
- MacAdam = 3 SDCM
- Diffuser: translucent PC (high mechanical resistance, UV stability)
- Body: grey PC (high mechanical resistance, UV stability)
- Reflector: white steel sheet (RAL 9003)
- Clips: polyamide + 15 % glass fibre or stainless steel + polyamide
- Sealing: polyurethane (PUR), foam-filled body groove
- Light fitting connection: **cable gland PG 13,5**
- Electric equipment: **EM kit including Ni-Cd battery without autotest, LED module**
- **EM kit including LiFePO₄ battery with autotest, LED module**
- The package includes: stainless hooks and stainless brackets
- 1-year warranty for battery, 2-year warranty for EM kit (unit + LED module)
- The above stated values of power consumption and luminous flux are within a tolerance of ± 7,5 %



Type	Autonomy [hrs]	Luminous flux of light fitting [lm]	Power in emergency mode [W]	Light fitting efficiency [lm/W]	Battery type	Power in standby mode [W]	Charging time [hrs]	Power in charging mode [W]	Net weight [kg]
Non-maintained emergency luminaire without autotest									
PRIMA 1.2ft PC NM1h	1	440	4,5	98	Ni-Cd	1,5	24	9	1,2
Non-maintained emergency luminaire with autotest									
PRIMA 1.2ft PC NM1hAt	1	440	3,3	133	LiFePO ₄	0,7	12	3,5	1,2

PRIMA PC with cable glands

Type	NM1h	3F NM1h
PRIMA 1.2ft PC ...	106617	106619

Non-maintained emergency luminaire without autotest - cable glands PG 13,5 - plastic clips

Type

Type	NM3hAt	3F NM3hAt
PRIMA 1.2ft PC ...	106618	106620

Non-maintained emergency luminaire with autotest - cable glands PG 13,5 - plastic clips

PRIMA PCc with cable glands

Type	NM1h	3F NM1h
PRIMA 1.2ft PCc ...	106621	106623

Non-maintained emergency luminaire without autotest - cable glands PG 13,5 - stainless clips (c)

Type

Type	NM3hAt	3F NM3hAt
PRIMA 1.2ft PCc ...	106622	106624

Non-maintained emergency luminaire with autotest - cable glands PG 13,5 - stainless clips (c)

LEGEND

- NM1h** – non-maintained emergency luminaire, operation time 1 hour
3F NM1h At – non-maintained emergency luminaire, operation time 1 hour, 5-wire throughwiring (3F), version with battery autotest
NM3h – non-maintained emergency luminaire, operation time 3 hours
3F NM3hAt – non-maintained emergency luminaire, operation time 3 hours, 5-wire throughwiring (3F), version with battery autotest

Module signalling without autotest


LED colour	Information
● green	Information
flashing	battery charging
-	running test/emergency mode

Module signalling with autotest (At)

LED colour	Information
● green ● red	Information
flashing -	battery charging
-	flashing defective LED module
-	shining defective battery
-	- running test/emergency mode


LIGHT FITTING ATTACHMENT

- a) Directly to a ceiling or a wall with the use of screws and stainless brackets
- b) Suspension with the use of stainless hooks
- c) Attachment with the use of side hangers to the wall

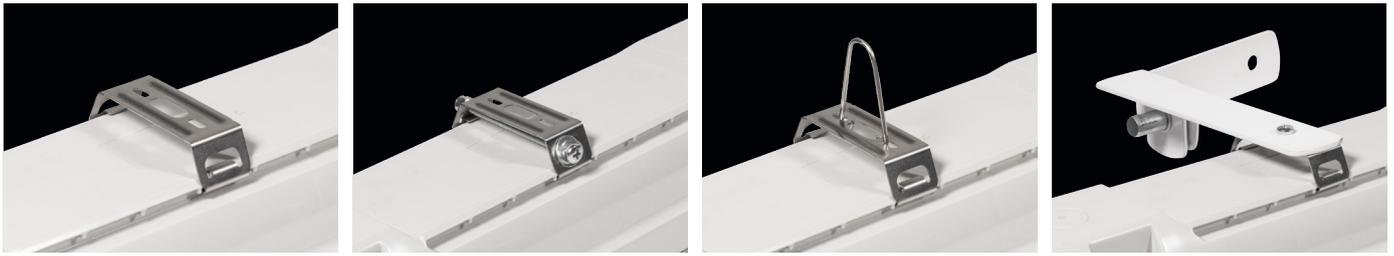

VARIABLE INSTALLATION PITCH

PRIMA NM

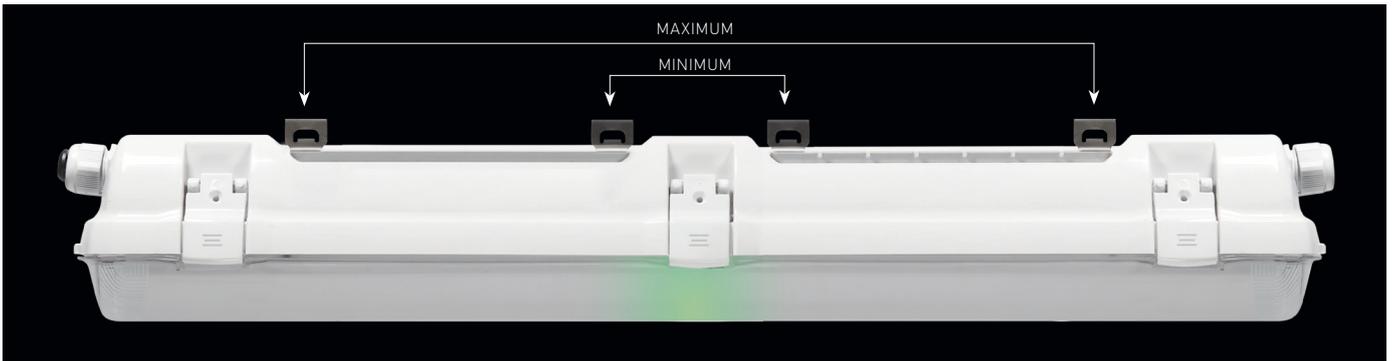

LIGHT FITTING DETAILED VIEW

PRIMA NM

