

INNOVA WB ABS



BIM
ready



... chemically resistant, for areas with low ceilings of 2.5 – 5 m.

USE

Closed and non-dismountable light fitting according to the standard ČSN EN 60598-1 part 4 intended for chemically challenging or agricultural premises with incidence of vapours like ammonia, lye, alkaline compounds and hot water (hydrolysis). Thanks to the **Wide Beam** optics it is suitable for inside spaces with low ceilings, intended for suspension height from 2.5 to 5 m, e.g. **inside walls and corridors of low agricultural and industrial buildings, workshops, corridors, cellars, farms, stables and laboratories** without explosion hazard. The structural design of the light fitting (IP69) allows even placement in food-processing industry - HACCP.


The light fitting resists dust, humidity and washing with spouting water up to 80°C. The body and the diffuser made of ABS material have high chemical resistance.

An external terminal strip makes it easy and quick to connect the supply cable with no need to open the **fitting (PLUG and PLAY system)**.

Emissions in the environment of use may reduce the usability of the plastics; for more information see page 367.

ADVANTAGES

- Light fitting protection **IP66 / IP69**
- High temperature resistance in a range from $t_a = -25^\circ\text{C}$ to $t_a = 50^\circ\text{C}$
- Lifetime: 50 000 hours / L90B10
- High chemical resistance
- **Wide Beam (WB)**, ceiling height 2.5 to 5 m
- **Variable suspension pitch**; optional installation of light fitting even on an existing structure on which the original light fittings were suspended
- **External terminal strip makes it easy to connect the supply cable – PLUG and PLAY system**
- Optional arrangement of light fittings in line without gaps
- **Fully automatic 100% control of functionality and tightness (leak test) during production**
- Easy cleaning and maintenance without need of replacing the light sources
- Eliminated risk of mechanical and electrostatic damage to LED chips
- Optional throughwiring (up to 5 wires inside the light fitting)
- Optional delivery in dimmable version
- Certificates: **ESĆ, ENEC, CB, DLG, HACCP**



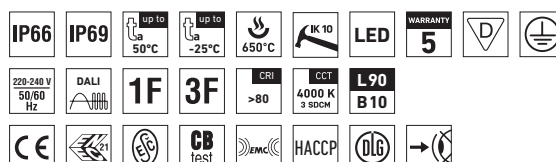


INNOVA WB ABS



TECHNICAL DESCRIPTION

- Light fitting protection: **IP66 / IP69**
- Maximum ambient temperature: **t_a = 50 °C**
- Lifetime: 50 000 hours / L90B10
- Maximum light fitting efficiency: 155 lm/W
- **CRI > 80: 4000 K** – standard
- CRI > 80: 3000 K, 5000 K, 6500 K – on request
- CRI > 90: 3000 K, 4000 K, 5000 K, 6500 K – on request
- MacAdam = 3 SDCM
- Diffuser: transparent ABS with Fresnel lenses, **Wide Beam** (high chemical resistance, UV stability)
- Body: dark grey ABS (high chemical resistance, UV stability)
- Snap-in mounting clips: stainless steel
- Ventilation membrane in the base eliminating vacuum and condensate build-up
- 3 or 5-pole **external terminal strip**, conductor cross-sectional area: 1.5 or 2.5 mm²
- Fittings may be **lined with zero distance** between them
- Optional constant luminous flux (CLO) in DALI version
- Electric equipment: LED modules, fixed output driver or DALI driver
- The package includes: stainless hooks and stainless brackets
- The values stated for power consumption and luminous flux are in a tolerance of ± 7,5 %

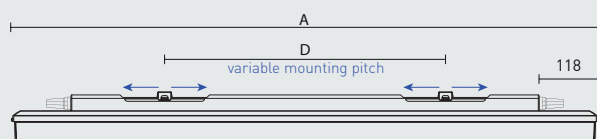

Type	Max, ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	UGR Longitudinal/transverse	Net weight [kg]	A [mm]	D [mm]
Up to ambient temperature t _a = 50 °C - body: dark grey ABS - diffuser with Fresnel lenses, WB (Wide Beam), transparent ABS									
INNOVA 1.4ft WB ABS 2600/840	50	2600	2290	16,1	142	22.8 / 19.1	1,5	1170	420 - 700
INNOVA 1.4ft WB ABS 3200/840	50	3100	2730	19,1	143	23.4 / 19.7	1,5	1170	420 - 700
INNOVA 1.4ft WB ABS 4400/840	45	4300	3780	26,0	145	24.6 / 20.8	1,5	1170	420 - 700
INNOVA 1.4ft WB ABS 6400/840	45	6120	5390	36,1	149	25.8 / 22.1	1,5	1170	420 - 700
INNOVA 1.5ft WB ABS 3250/840	50	3240	2850	19,5	146	22.8 / 19.1	1,8	1450	700 - 980
INNOVA 1.5ft WB ABS 4000/840	50	3850	3390	23,3	145	23.4 / 19.7	1,8	1450	700 - 980
INNOVA 1.5ft WB ABS 5500/840	45	5340	4700	31,9	147	24.6 / 20.9	1,8	1450	700 - 980
INNOVA 1.5ft WB ABS 8000/840	45	7780	6850	44,3	155	25.9 / 22.2	1,8	1450	700 - 980

INNOVA WB ABS

Diffuser with Fresnel lenses, Wide Beam, transparent ABS

Type	1x3P	1x5P	DALI 1x5P	2x3P	2x5P	DALI 2x5P
INNOVA 1.4ft WB ABS 2600/840...	72611	72612	72613	72615	72616	72617
INNOVA 1.4ft WB ABS 3200/840...	72621	72622	72623	72625	72626	72627
INNOVA 1.4ft WB ABS 4400/840...	72631	72632	72633	72635	72636	72637
INNOVA 1.4ft WB ABS 6400/840...	72641	72642	72643	72645	72646	72647
INNOVA 1.5ft WB ABS 3250/840...	72651	72652	72653	72655	72656	72657
INNOVA 1.5ft WB ABS 4000/840...	72661	72662	72663	72665	72666	72667
INNOVA 1.5ft WB ABS 5500/840...	72671	72672	72673	72675	72676	72677
INNOVA 1.5ft WB ABS 8000/840...	72681	72682	72683	72685	72686	72687

Example of type marking: 72643 = INNOVA 1.4ft WB ABS 6400/840 **DALI 1x5P**

LEGEND

- 1x3P** - a version featuring a non-dimmable ballast and a single 3-pole external terminal strip
- 1x5P** - a version featuring a non-dimmable ballast and a single 5-pole external terminal strip
- DALI 1x5P** - a version featuring a digitally dimmable ballast and a single 5-pole external terminal strip
- 2x3P** - a version featuring a non-dimmable ballast, two 3-pole external terminal strips and 3-wire connecting cables (1F), for continuous row installation
- 2x5P** - a version featuring a non-dimmable ballast, two 5-pole external terminal strips and 5-wire connecting cables (3F), for continuous row installation
- DALI 2x5P** - a version featuring a digitally dimmable ballast, two 5-pole external terminal strips and 5-wire connecting cables (DALI 1F), for continuous row installation

LIGHT FITTING ATTACHMENT

- a) Directly to a ceiling or a wall with the use of screws and stainless brackets
- b) Suspension with the use of stainless hooks
- c) Attachment with the use of side hangers to the wall - is not included in accessories




VARIABLE INSTALLATION PITCH



LIGHT FITTING INTERCONNECTION

An external terminal strip is used to ensure the supply cable can easily and quickly be connected with no need to open the light fixture (PLUG and PLAY system)

Interconnection of light fittings without spacing

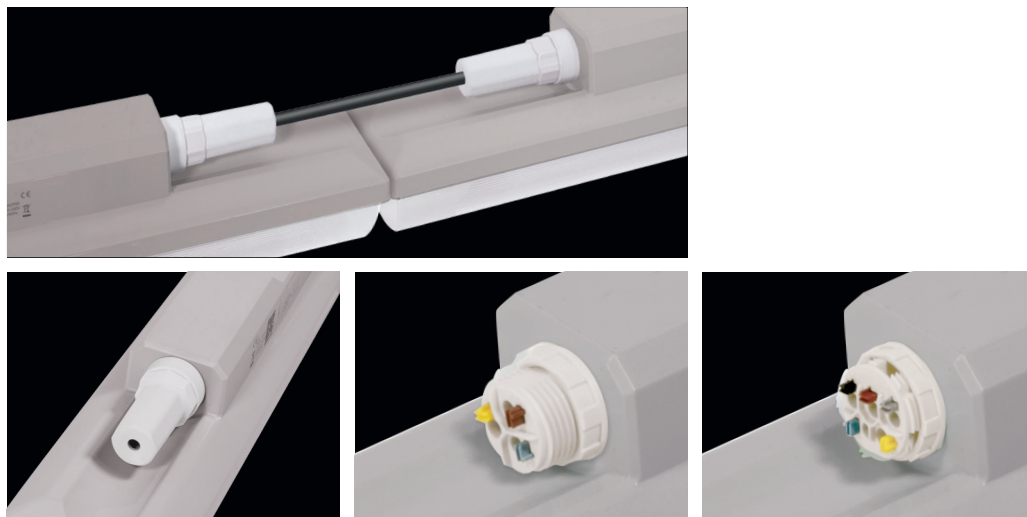

LIGHT FITTING DETAILED VIEW

INNOVA WB ABS

