

LANUS ROUND

NEW




... aluminium, dustproof, waterproof round light fitting

USE

The fitting is suitable for indoor industrial spaces, warehouses, sports halls and advertisement spaces.

ADVANTAGES

- Light fitting protection **IP66**
- Ambient temperature from **-40°C to 45°C**
- Lifetime: 50 000 hours / L80B10
- High **mechanical resistance IK10**
- Body: aluminium alloy, graphite black (RAL 9001)
- Optical cover: clear PMMA with integrated optics
- Constant luminous flux even in ambient temperature of -40 °C
- Standard model CRI > 80: 4000 K
- At request CRI > 80: 3000 K, 5000 K, 6500 K, CRI > 90: 3000 K, 4000 K, 5000 K, 6500 K
- Connection: a 0.4m 3-core 3x1mm² CYSY cable
- Insulation: class I

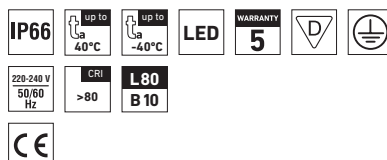


LANUS ROUND



TECHNICAL DESCRIPTION

- Light fitting protection **IP66**
- Ambient temperature from **-40°C to 45°C**
- Maximum system efficacy: **155 lm/W**
- Lifetime: 50 000 hours / L80B10
- Body: aluminium alloy, graphite black (RAL 9001)
- Reflector cover made of clear PMMA with integrated optics
- Standard model CRI > 80: 4000 K
- Connection: a 0.4m 3-core 3x1mm2 CYSY cable
- Mounting: supplied with an eye bolt
- Electric equipment: LED modules, 1-10V dimmable driver controlled by 2-core 2x0,5mm2 cable
- Beam angle: 60° or 90°
- The values stated for power consumption and luminous flux are in a tolerance of ± 7.5 %

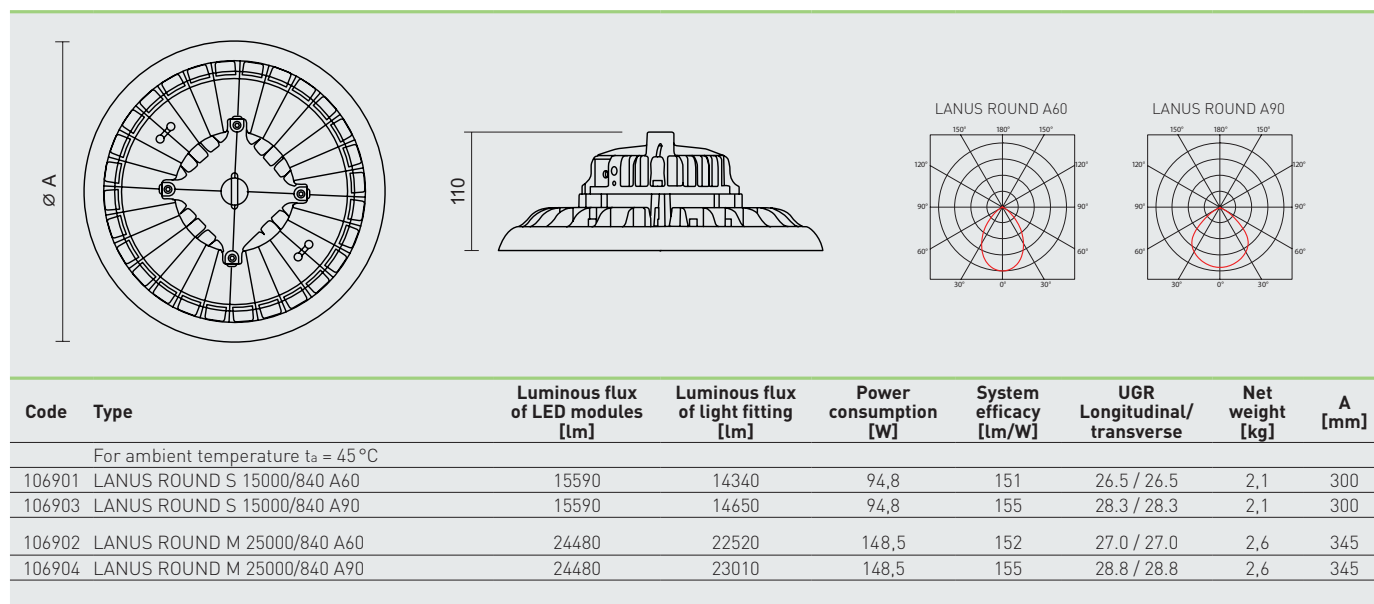

LIGHT FITTING ATTACHMENT

An eye bolt is supplied with the fitting.



LIGHT FITTING DETAILED VIEW

LANUS ROUND

