

# LYRA



... fashionable for every interior.


## USE

LYRA is round LED wall and ceiling – mounted fashionable luminaire for every interior.

It is perfect solution for residential zones, corridors, lounges, hotels, restaurants and entrance areas.

## ADVANTAGES

- Light fitting protection IP54
- Temperature resistance from  $t_a$  -10 to 35 °C
- Lifetime: 50 000 hours / L80B50
- High mechanical resistance: IK10



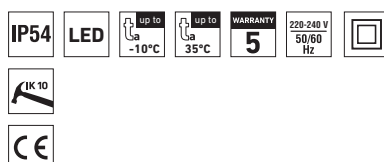


## LYRA



## TECHNICAL DESCRIPTION

- Light fitting protection: IP54
  - Maximum ambient temperature: 35 °C
  - Lifetime: 50 000 hours / L80B50
  - Maximum light fitting efficiency: 113 lm/W
  - CRI > 80: 4000 K
  - CRI > 80: 3000 K
  - Diffuser: translucent polycarbonate
  - Body: polycarbonate
  - Light source body: polycarbonate
  - Electronic equipment: LED modules, fixed output driver
- The values stated for power consumption and luminous flux are in a tolerance of + - 7,5%



Code	Type	Max. ambient temperature [°C]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	UGR Longitudinal/transverse	Net weight [kg]	A [mm]	D [mm]
For ambient temperature max. $t_a = 35\text{ °C}$ - body: polycarbonate - diffuser: translucent polycarbonate									
41001	LYRA 1500/840	35	1670	14,8	113	27.9 / 27.8	0,6	200	43
41002	LYRA 1500/830	35	1540	14,8	104	27.6 / 27.5	0,6	200	43

## LIGHT FITTING ATTACHMENT AND ITS DETAILED VIEW

Directly to a ceiling or a wall with the use of screws

