

PRIMA VALUE

NEW



... dustproof, waterproof and impact resistant.


USE

It is designed for indoor spaces, **industrial premises, agricultural buildings, warehouses as well as sports facilities, transport hubs, car parks and garages, workshops and laboratories** with no explosion hazard.

Made of clear polycarbonate, the base and the diffuser boast **high impact and deformation resistance**. Emissions in the environment of use may reduce the usability of the plastics.

ADVANTAGES

- Light fitting protection **IP66**
- High temperature resistance in a range from $t_a = -25^{\circ}\text{C}$ to $t_a = 45^{\circ}\text{C}$
- Lifetime: 50 000 hours / L90B10
- High **mechanical resistance IK10**
- **Variable suspension pitch**, optional installation of light fitting even on an existing structure on which the original light fittings were suspended
- Standard model CRI > 80: 4000 K
- Certificates: CE (only)

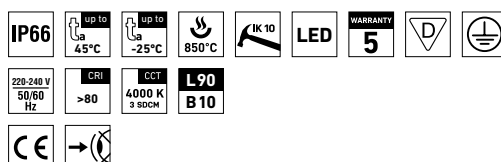


PRIMA VALUE PC, PCc



TECHNICAL DESCRIPTION

- Light fitting protection: **IP66**
- Maximum ambient temperature: **ta = 45 °C**
- Lifetime: 50 000 hours / L90B10
- Maximum light fitting efficiency: **140 lm/W**
- **CRI > 80: 4000 K** – standard
- MacAdam = 3 SDCM
- Diffuser: **translucent PC** (high mechanical resistance, UV stability)
- Body: grey PC (high mechanical resistance, UV stability)
- Reflector: steel sheet, white colour (RAL 9003)
- **Mounting clips:** stainless steel, stainless steel hooks included
- Clips: polyamide + 15 % glass fibre or stainless steel + polyamide
- Sealing: polyurethane (PUR), foamed body groove
- Cable glands: rubber (SBS)
- Terminal block: screwless, three-pole (basic version), or screwed
- The values stated for power consumption and luminous flux are in a tolerance of $\pm 7.5 \%$

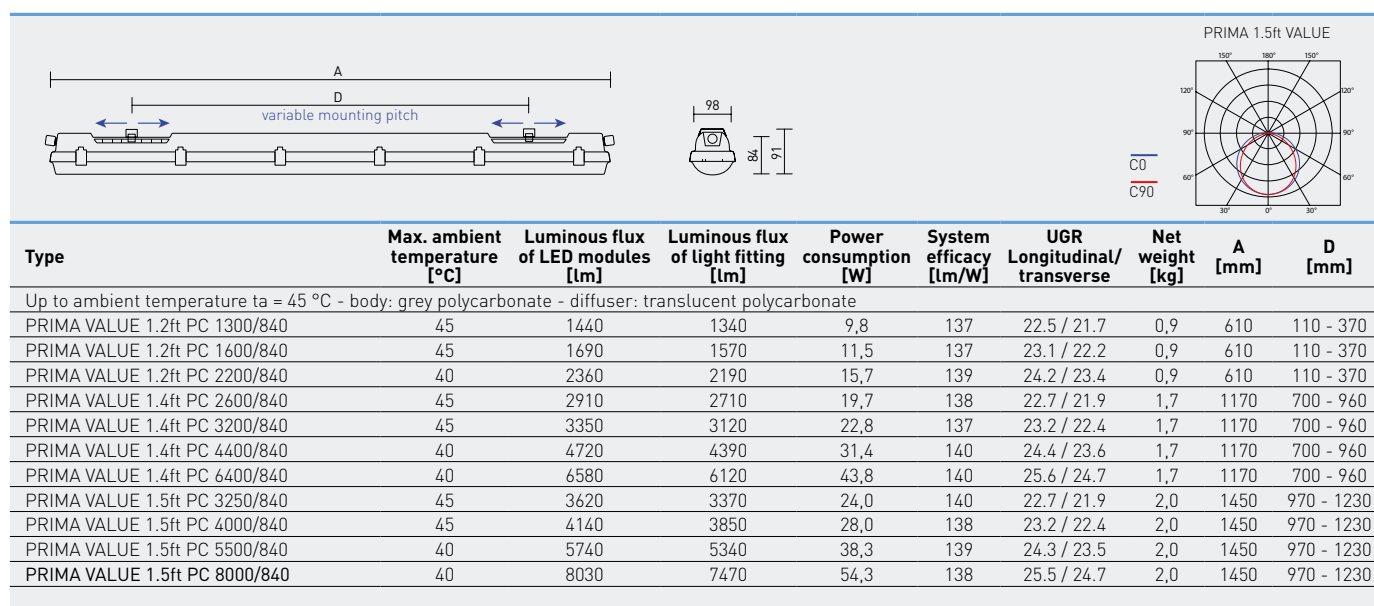

PRIMA VALUE PC

Code	Type
106729	PRIMA VALUE 1.2ft PC 1300/840
106730	PRIMA VALUE 1.2ft PC 1600/840
106731	PRIMA VALUE 1.2ft PC 2200/840
106732	PRIMA VALUE 1.4ft PC 2600/840
106733	PRIMA VALUE 1.4ft PC 3200/840
106734	PRIMA VALUE 1.4ft PC 4400/840
106735	PRIMA VALUE 1.4ft PC 6400/840
106736	PRIMA VALUE 1.5ft PC 3250/840
106737	PRIMA VALUE 1.5ft PC 4000/840
106738	PRIMA VALUE 1.5ft PC 5500/840
106739	PRIMA VALUE 1.5ft PC 8000/840

Non-dimmable driver - plastic clips

1F	3F	M1h	M3h	3F M1h	3F M3h
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x

PRIMA VALUE PCc

Code	Type
106740	PRIMA VALUE 1.2ft PCc 1300/840
106741	PRIMA VALUE 1.2ft PCc 1600/840
106742	PRIMA VALUE 1.2ft PCc 2200/840
106743	PRIMA VALUE 1.4ft PCc 2600/840
106744	PRIMA VALUE 1.4ft PCc 3200/840
106745	PRIMA VALUE 1.4ft PCc 4400/840
106746	PRIMA VALUE 1.4ft PCc 6400/840
106747	PRIMA VALUE 1.5ft PCc 3250/840
106748	PRIMA VALUE 1.5ft PCc 4000/840
106749	PRIMA VALUE 1.5ft PCc 5500/840
106750	PRIMA VALUE 1.5ft PCc 8000/840

Non-dimmable driver - stainless clips (c)

1F	3F	M1h	M3h	3F M1h	3F M3h
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x
x	x	x	x	x	x

LEGEND

1F	1-phase 3 core through-wiring in the luminaire
3F	3-phase 5 core through-wiring in the luminaire
M1h	emergency back-up source with 1 hour operating time for maintained emergency illumination

M3h	emergency back-up source with 3 hour operating time for maintained emergency illumination
3F Mxh	3-phase 5 core through-wiring in the luminaire (L3 used for emergency unit unswitched power supply)

LIGHT FITTING ATTACHMENT

- a) Directly to a ceiling or a wall with the use of screws and stainless brackets
b) Suspension with the use of stainless hooks
c) Attachment with the use of side hangers to the wall - is not included in accessories



LIGHT FITTING DETAILED VIEW

PRIMA VALUE PC

