

SB LED




... indoor.

USE

The luminaire is an excellent choice for sanitary rooms, toilets, kitchen units, wall units, dressing rooms, worktops and shop windows.

ADVANTAGES

- Light fitting protection IP20
- Maximum ambient temperature up to $t_a = 35^\circ\text{C}$
- Integrated switch in side plastic cover
- Packaging: white cover, scratch protection
- Sliding mounting spacers

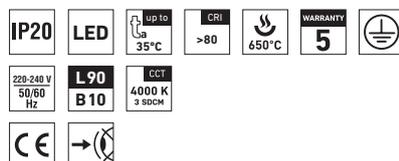


SB LED



TECHNICAL DESCRIPTION

- Light fitting protection: IP20
- Maximum ambient temperature up to $t_a = 35\text{ }^\circ\text{C}$
- Diffuser: translucent polycarbonate (PC), UV stable, impact-resistant
- Body: aluminium profile, white (RAL 9003)
- Terminal block: screwed, three-poles
- Side cover: white, plastic (ABS)
- Integrated switch in side plastic cover
- Electric equipment: LED modules, current driver
- Maximum system efficacy: 146 lm/W
- Lifetime: 50 000 hours / L90B10
- MacAdam = 3 SDCM
- The watt and lumen values can, in accordance with valid standards, vary by $\pm 7,5\%$
- CRI \rightarrow 80: 3000, 4000 K
- Sliding spacers (PA-GF)

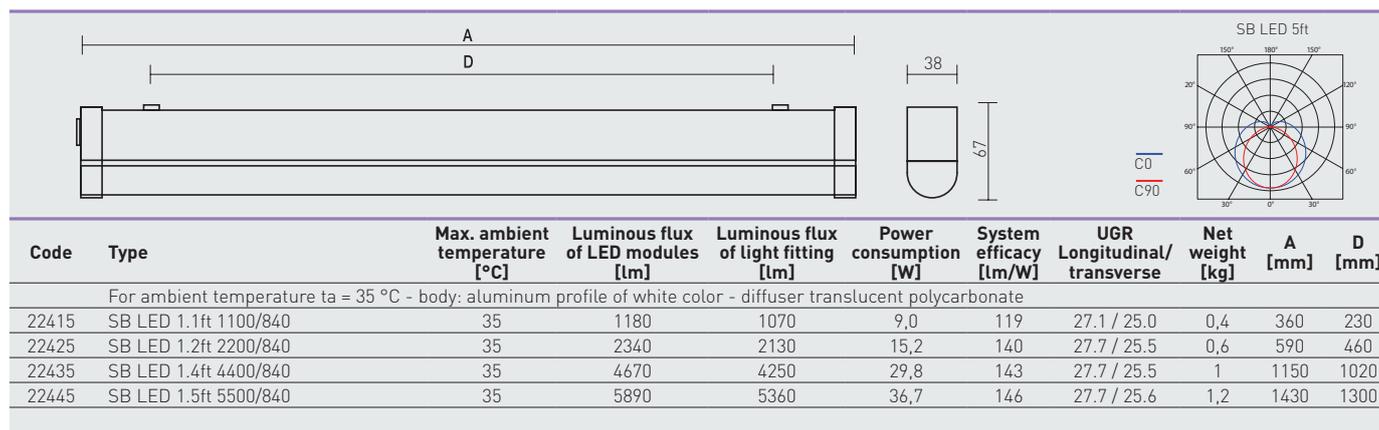

LIGHT FITTING ATTACHMENT

Directly to a ceiling or a wall with the use of screws

