

LINEA



TREVOS

Are you looking for quality LED interior lighting?

LINEA family is a perfect lighting solution of modern and technically functional illumination. It offers ceiling and wall-mounted luminaires with balanced shadowing and uniform light. Thanks to various sizes, individual premises as well as public buildings can be attractively illuminated.



Support of natural
biorhythm



Suitable for
the office



Nízká spotřeba
energie



WHY?

Stylish into any interior design

Flexible uses

Cost-effective solution

Suitable both wall and ceiling mounting


Opal and homogeneously illuminated cover (UGR 22)

Suitable where higher protection ratings (IP54) are required



WHY?

ROUND SQUARE RECTANGULAR

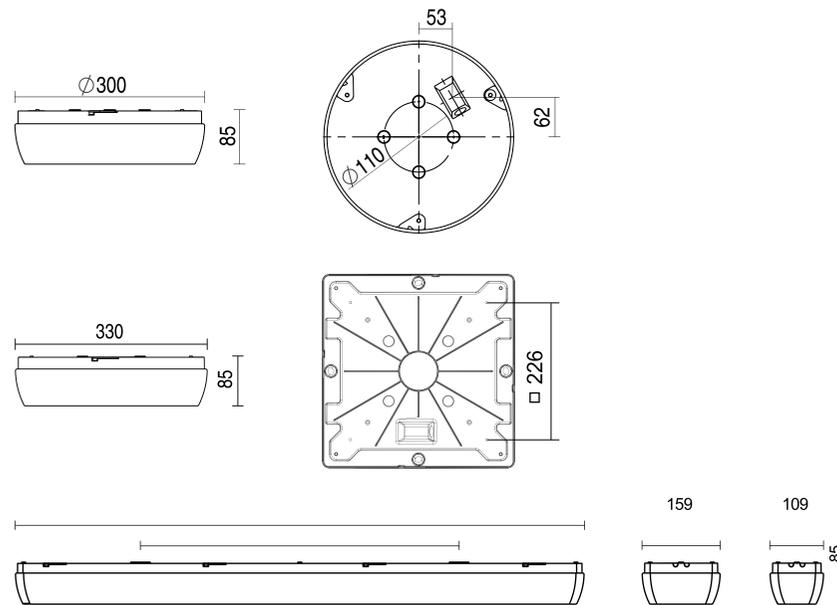



APPLICATIONS

HOUSEHOLDS
RETAIL



APPLICATIONS

OFFICE

EDUCATION

ENTRANCE AREAS

CLASSROOMS

AUDITORIUMS



APPLICATIONS

**HOSPITALS
SANITARY AND
WELFARE FACILITIES**



BENEFITS

- 5 year of guarantee
- Integral emergency 1h and 3h
- DALI and sensor versions available
- Very easy installation and maintenance
- Certification ENEC, CB, CE
- Made in the Czech Republic by professionals
- BIM application



TECHNICAL FEATURES

IK10 impact resistant PC diffuser

IP54 protection

Very efficient up to 126lm/W

Powerful range from 1550 lm – 8800 lm

Opal and homogeneously illuminated cover (UGR 22)




Maximum ambient temperature up to $t_a = 35^\circ\text{C}$



Body from white UV stable polycarbonate (PC)

Service life 50 000 hours (L90)

3000K, 4000K, 5000K, 6500K



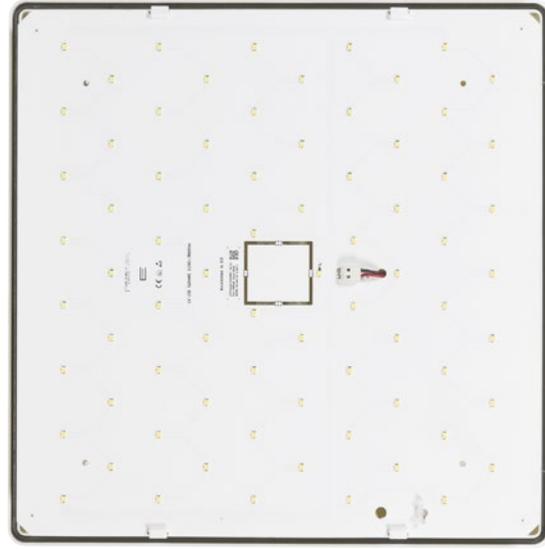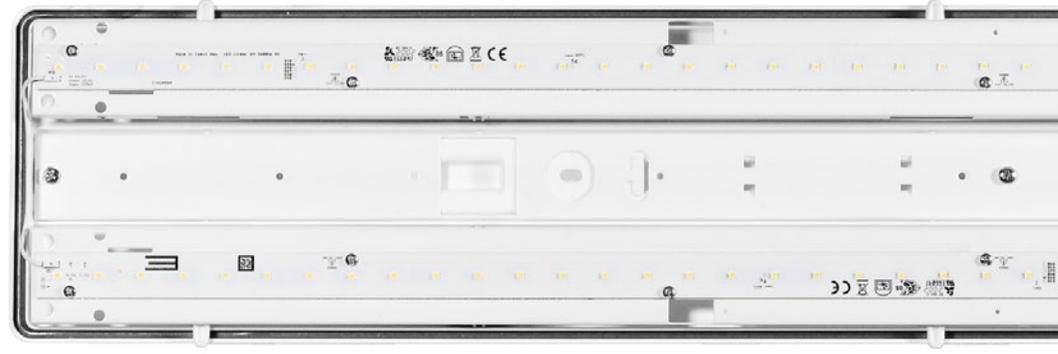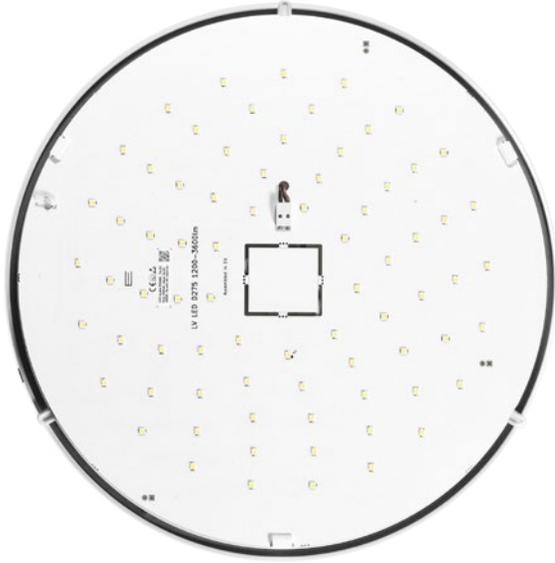


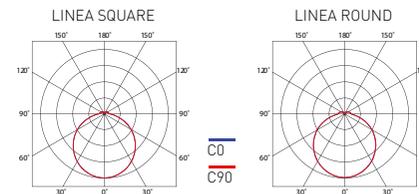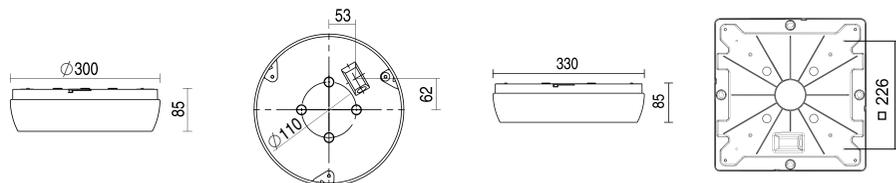

LINEA ROUND	Ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]
LINEA ROUND 1550/840	35	1550	1220	10	146	1
LINEA ROUND 1900/840	35	1900	1500	12	149	1
LINEA ROUND 2200/840	35	2200	1740	14	150	1
LINEA ROUND 2500/840	35	2500	1980	16	148	1
LINEA ROUND 3600/840	30	3600	2840	24	148	1,1

LINEA SQUARE

LINEA ROUND 1550/840	35	1550	1240	10	124	1,4
LINEA ROUND 1900/840	35	1900	1520	12	127	1,4
LINEA ROUND 2200/840	35	2200	1760	14	126	1,4
LINEA ROUND 2500/840	35	2500	2000	16	125	1,4
LINEA ROUND 3600/840	30	3600	2880	24	120	1,5

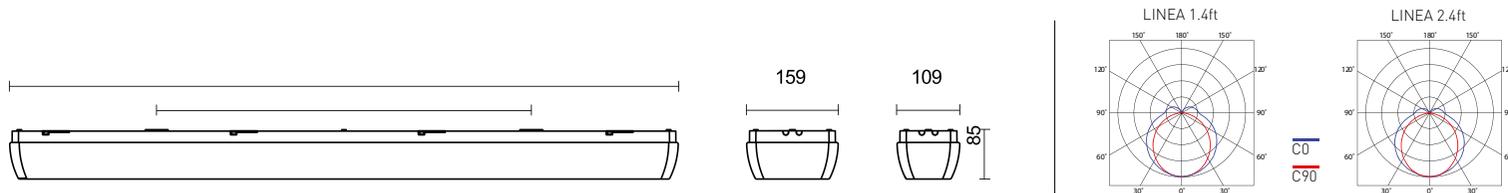

LINEA	Ambient temperature [°C]	Luminous flux of LED modules [lm]	Luminous flux of light fitting [lm]	Power consumption [W]	System efficacy [lm/W]	Net weight [kg]	A (mm)	D (mm)
LINEA 1.4ft 2600/840	35	2580	2170	16	136	1,9	1160	650
LINEA 1.4ft 3200/840	35	3110	2610	16	131	1,9	1160	650
LINEA 1.4ft 4400/840	35	4350	3650	27	135	1,9	1160	650
LINEA 2.4ft 5200/840	35	5150	4220	31	136	2,5	1160	650
LINEA 2.4ft 6400/840	35	6260	5130	37	139	2,5	1160	650
LINEA 2.4ft 8800/840	35	8710	7140	51	140	2,5	1160	650

LINEA

TREVOS, a.s.

Nová Ves 34
511 01 Turnov
Česká republika

Telefon: +420 481 363 347
Email: obchod@trevos.cz



www.trevos.eu