

TREEVOS

CZECH LED
LUMINAIRES



PRIMA

... GIVE YOUR SPACE **THE KIND**
OF LIGHT IT DESERVES

TIME PASSES, TIMES CHANGE AND WE DESIGN INNOVATIONS...


Our popular and traditional PRIMA LED light fittings, which have been our customers' favourite for more than 14 years, have now come of age. Thanks to many years of experience and feedback gathered from you, our customers, we have perfected them and pushed them even further.

We designed a new generation of PRIMA light fittings for you, building on the proven quality that you are used to and, at the same time, introducing a number of innovations and improvements.

We cannot wait for our new product line of PRIMA light fittings to become your favourite products for years to come.

PRIMA LED has upgraded to a more modern design, bringing better features under a new name:

PRIMA

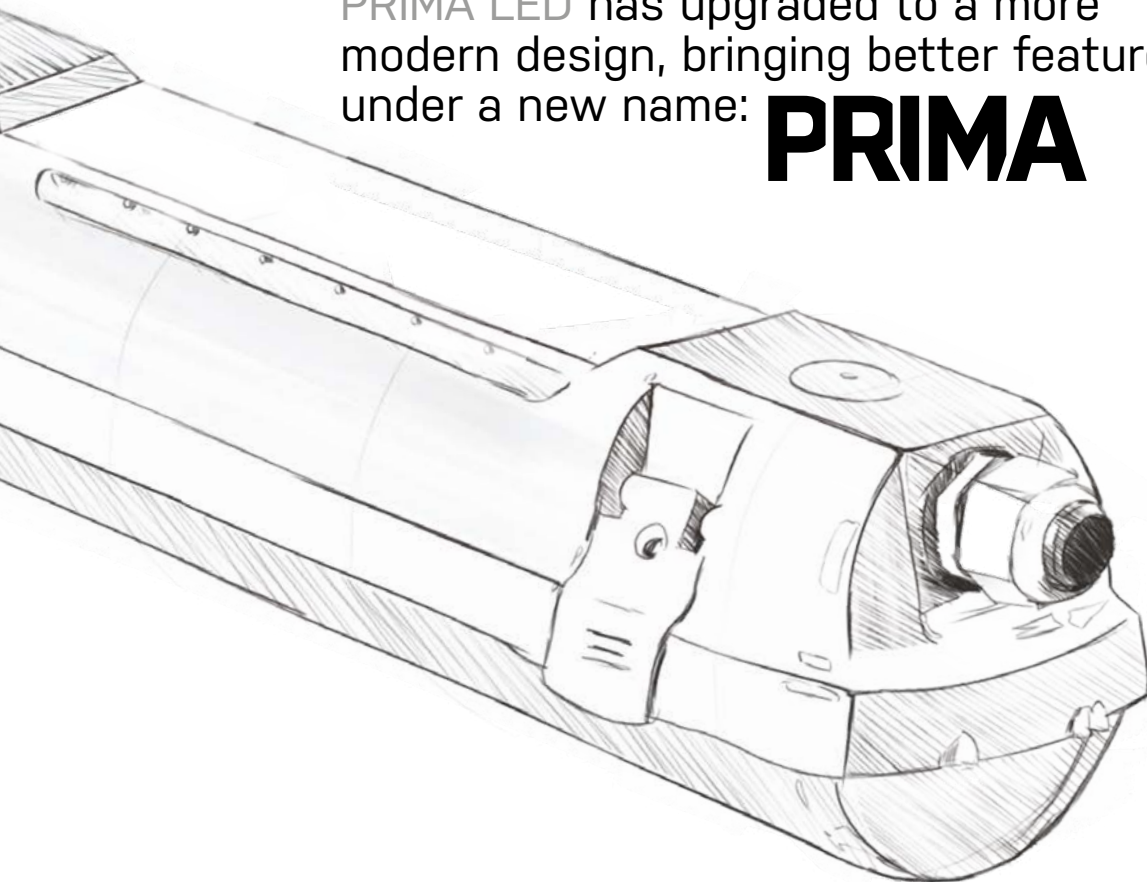



WHY NEW PRIMA?

our new product line of industrial light fittings

ADVANTAGES:

- light fitting protection: IP66/IP69
- higher outputs up to 165 lm/W
- higher resistance to ambient temperature +50°C
- improved brightness homogeneity
- more compact size
- variable pitch for easy assembly
- EPDs
- certification



USE:


- industrial halls
 - logistics and storage areas
 - parking areas and garages
 - car washes
 - transport terminals
 - farm buildings
 - sports grounds
 - workshops and laboratories
- without the risk of explosion
of gases, dust and flammable vapours




DUSTPROOF
WATERPROOF



IMPACT
STRENGTH



WITHOUT BLINKING
EFFECT



LIFE TIME: 50000 HOURS
(L90/B10)



5 YEARS
WARRANTY



EASY AND QUICK
MOUNTING

... give your space the kind of light it deserves.




VARIANTS OF LUMINAIRES

TYPE	CHARACTER	CEILING	MATERIAL BODY/ MATERIAL DIFFUSER
PRIMA	basic	3 - 8 meters high ceilings	PC/PC
PRIMA VP	ventilation membrane, outdoor sheltered places	3 - 8 meters high ceilings	PC/PC
PRIMA ABS	chemically resistant	3 - 8 meters high ceilings	ABS/MABS
PRIMA VP ABS	ventilation membrane, outdoor sheltered places, chemically resistant	3 - 8 meters high ceilings	ABS/MABS
PRIMA CLASS II	class II insulation	3 - 8 meters high ceilings	PC/PC
PRIMA TRS	fully transparent	3 - 8 meters high ceilings	TRS PC/PC
PRIMA MAX	for extreme temperatures, -40°C + 65°C	3 - 8 meters high ceilings	PCc/PCc
PRIMA SNS	with motion detector	3 - 6 meters high ceilings	PC/PC


Wiring variants: 1F and 3F

Variants with emergency module: M1h, M3h, 3F M1h a 3F M3h

Digitally dimmable power supply: DALI, DALI 1F, DALI 3F, DALI 3F Mxh

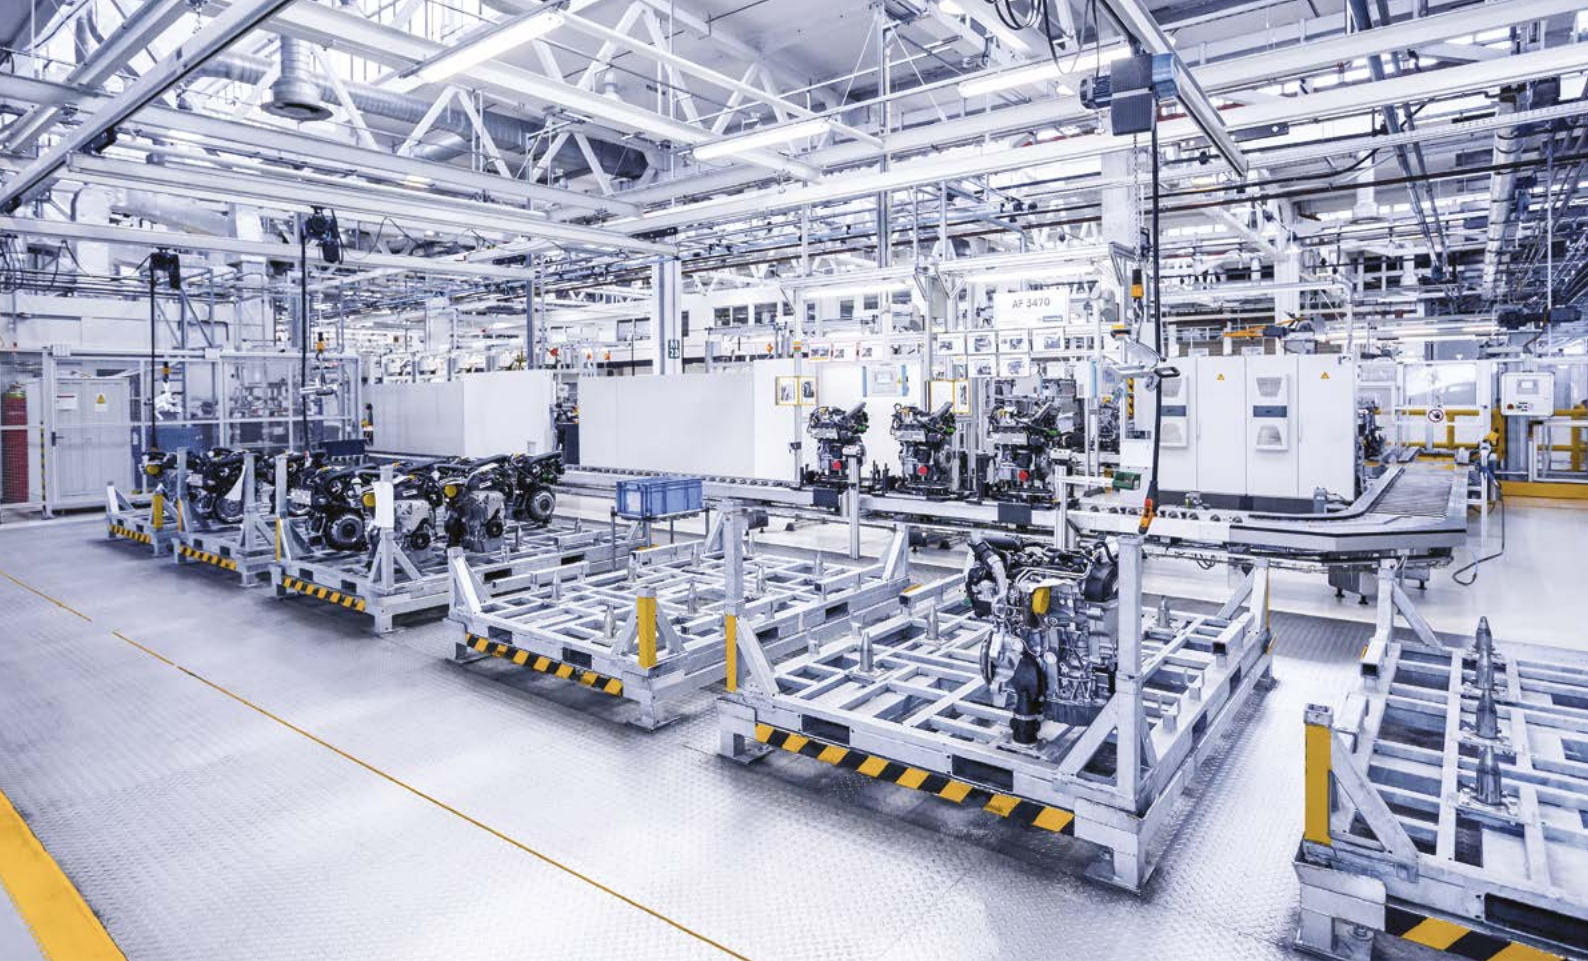

TECHNICAL SPECIFICACION

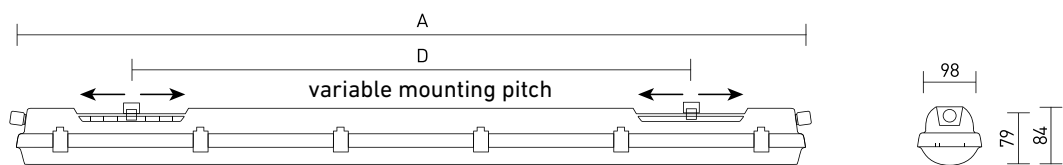

	Number of clips (pcs)	A [mm]	D [mm]
PRIMA 1.2 ft	6	615	110 - 370
PRIMA 1.4 ft	12	1175	700 - 960
PRIMA 1.5 ft	14	1455	970 - 1230





Plastic or metal clips



MATERIALS

VARIANTS OF BASE MATERIAL

PC/PC

PC for basic use and impact resistance

ABS/MABS

ABS for chemically aggressive environments with ammonia, fats, oils, acids and alkalis

TRS PC/PC

Transparent (TRS) PC for low mounting in indoor parking spaces

PC/PC




ABS/MABS



TRS
PC/PC




MAXIMUM MOUNTING PITCH

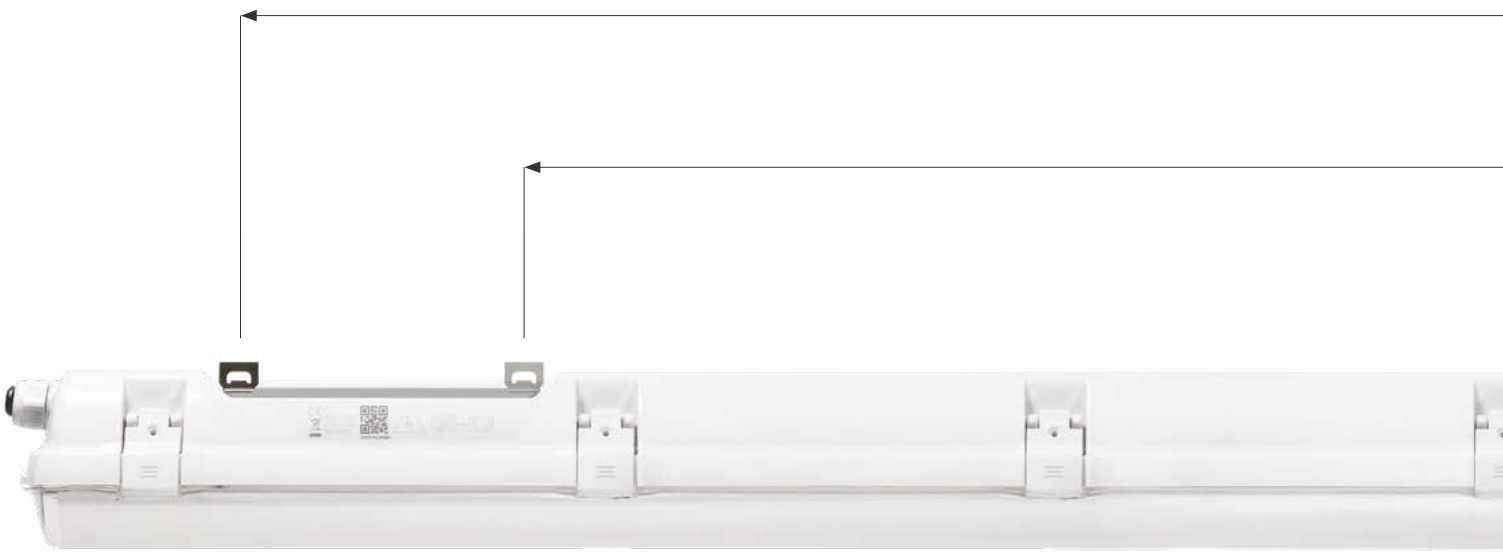

IP66


The light fitting is fully protected against dust and jet water under pressure.
No dust or water can penetrate the light fitting.

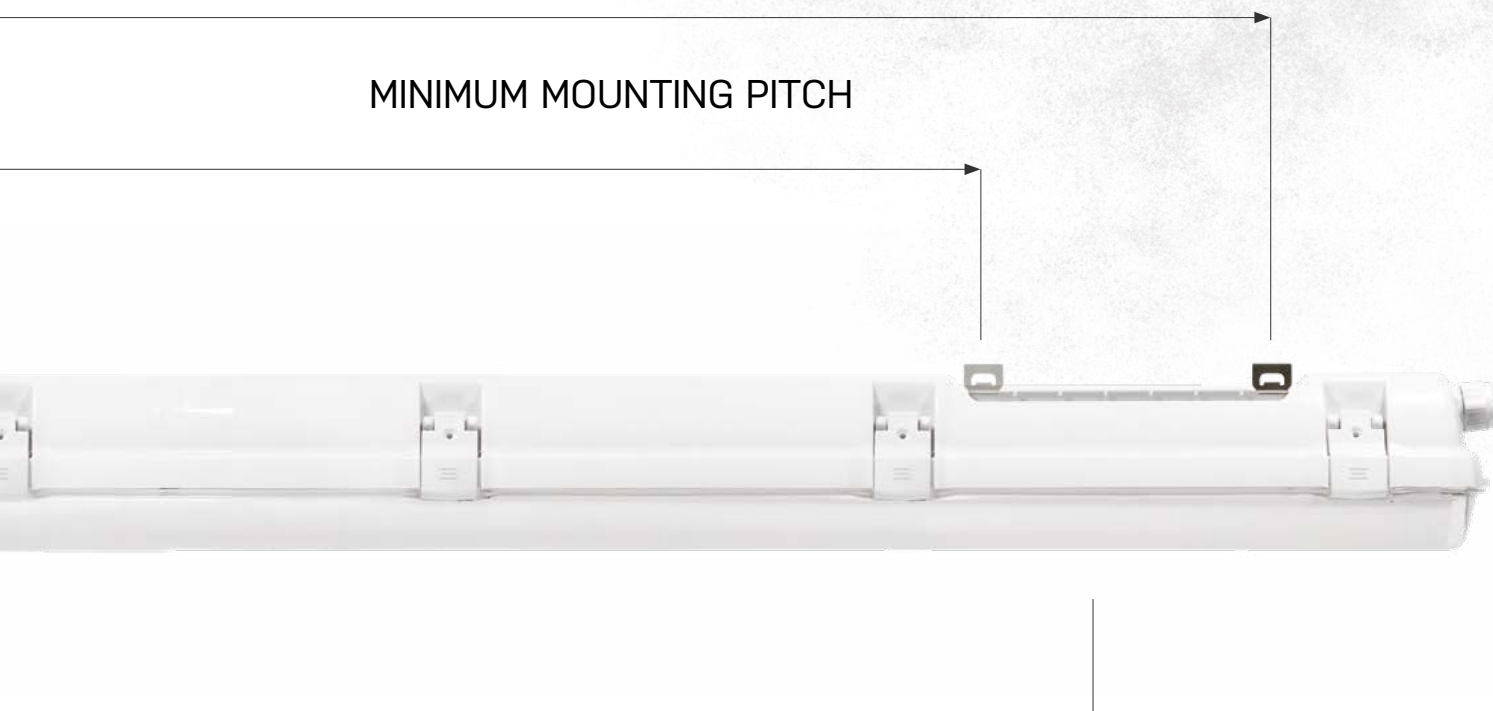


IP69

The light fitting is fully protected against dust and jet water at a temperature of 80°C under pressure. No dust or water can penetrate the light fitting.

HERE YOU **WILL FIND**
THE CURRENT
OFFER OF PRIMA LUMINAIRES





PRIMA

TREVOS, a.s.

Nova Ves 34
511 01 Turnov
Czech Republic

Email: trevos@trevos.cz



www.trevos.com