


NANOITICA

ABSOLUTE LIGHT CONTROL

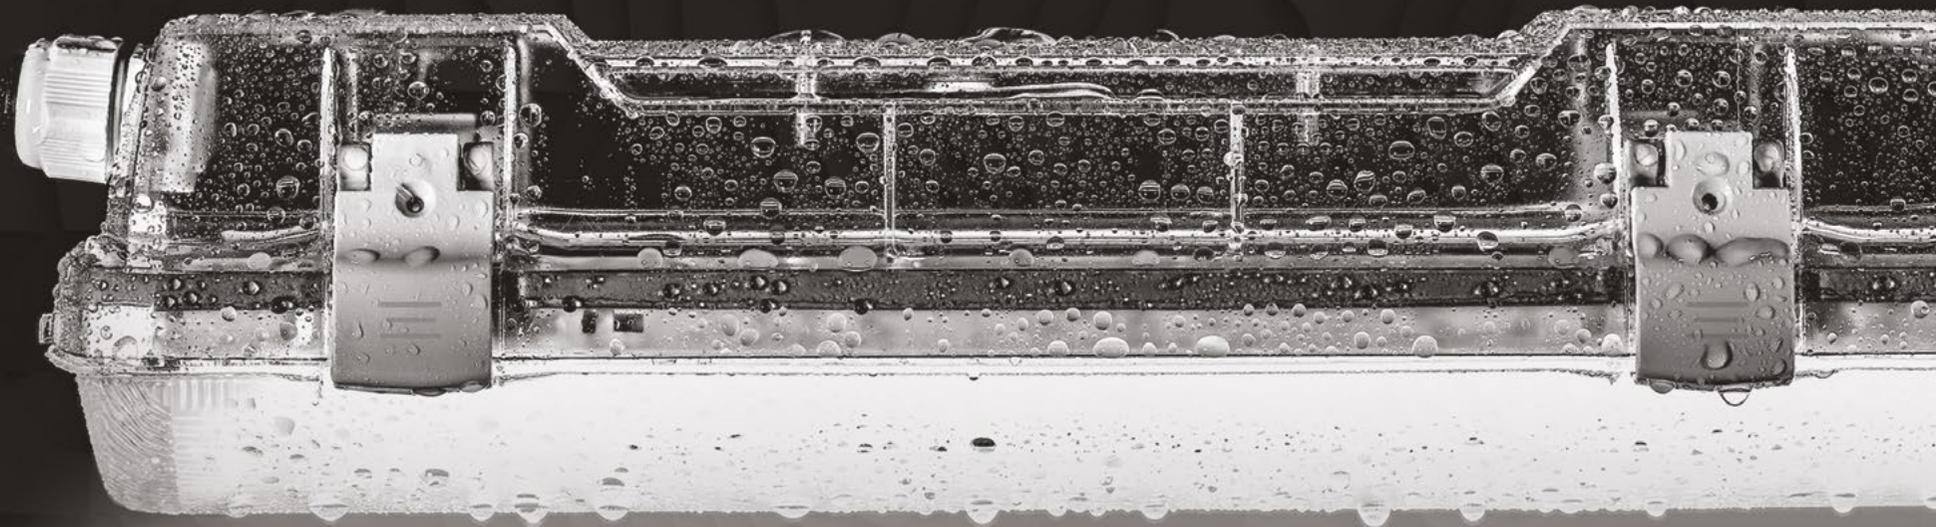

TREEVOS

NANOTTICA builds on our 16-year-old most successful range of moisture-proof PRIMA LED luminaire. A Trevos' breakthrough weather-proof luminaire with patent-pending NANOOPTICS technology for a unique diffuser, is coming.

NANOOPTICS technology has the power to absolutely control the light out of the luminaire. Nanottica with its LED service life of 50,000 hours (L90), low level of UGR and up to 65°C temperature resistance provides the professional solution of up to 180 lm/W in demanding industrial surroundings.



**PATENT
PENDING**



**Unique
nano-diffuser**



WHY?

Breakthrough **NANOOPTICS** in a pure diffuser
patent-pending technology
Improved lighting effect through targeted lighting
concepts within the entire space
High efficiency in minimization of direct discomfort glare
Great visual comfort, preventing tired eyes and improved people productivity
Balanced shadowing and uniform light
Maximum economic and energy efficiency
Dimmable luminaire with DALI controllable electronic ballast



**SAVE
ENERGY**




**High optical
efficiency 94%**




**LOW
UGR < 19**

High optical
efficiency **94%**

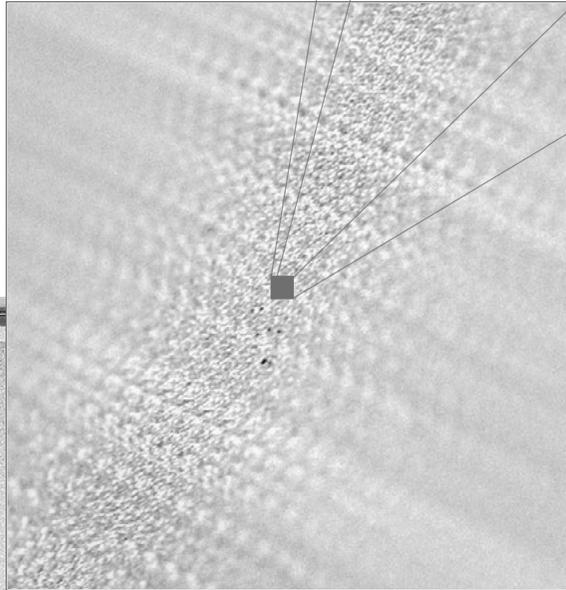

sophisticated
nanostructure
with **extraordinary**
optical properties

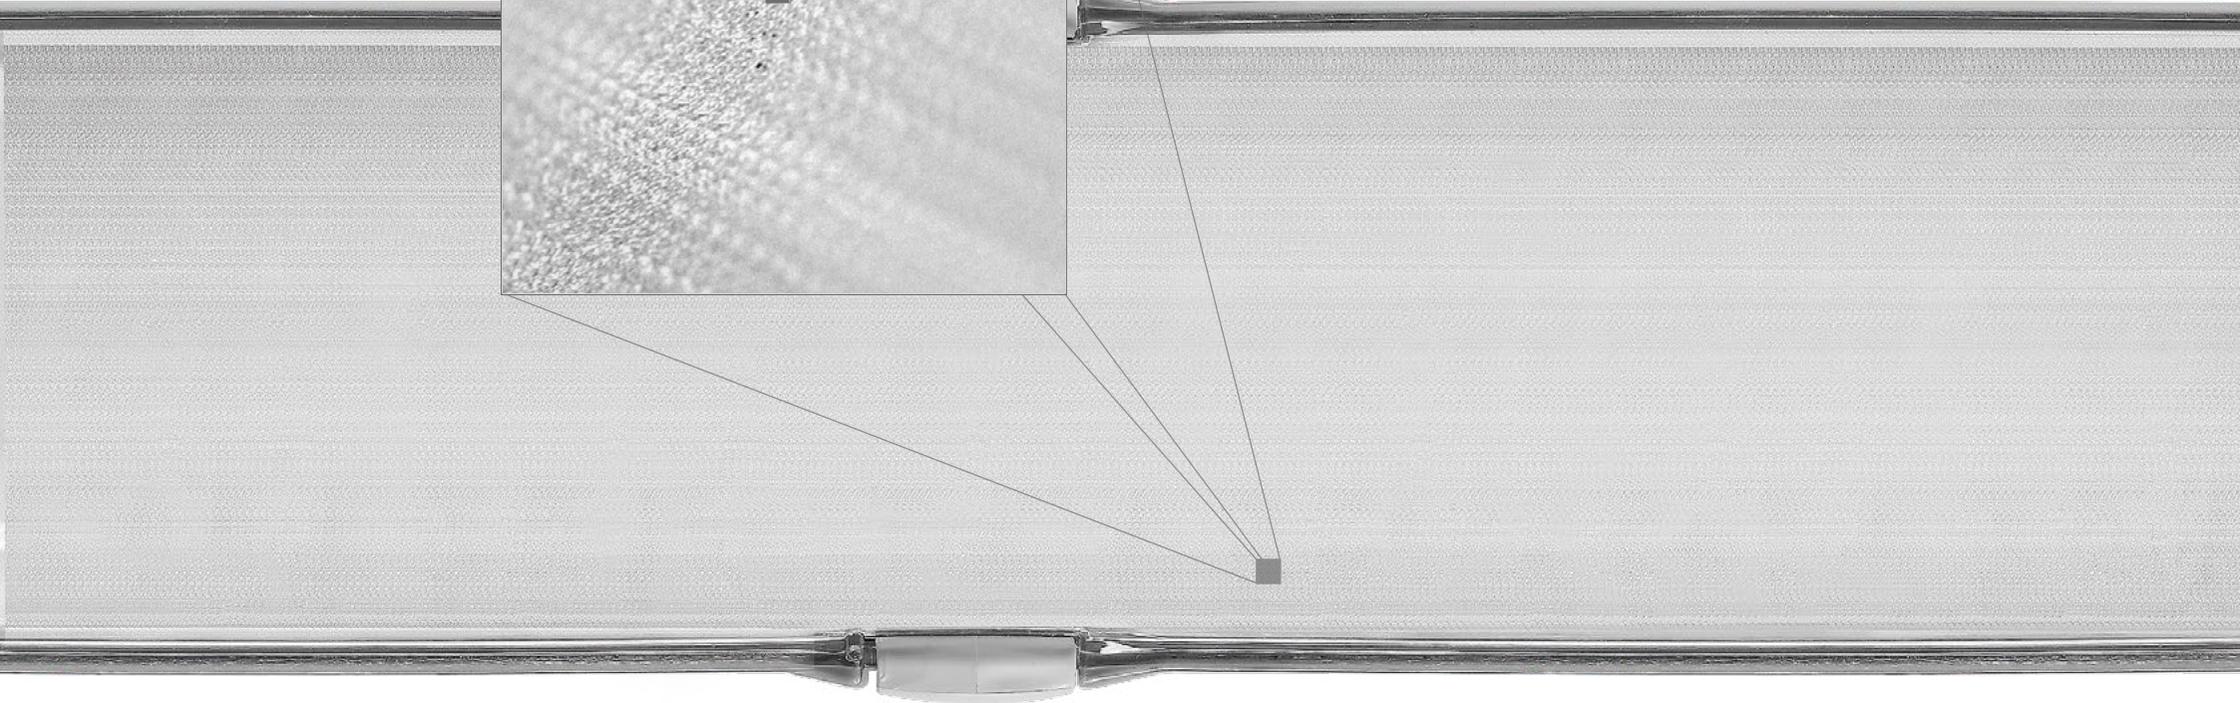


WHY?

Transparent luminaire cover with an embossed NANOOPTICAL structure

Absolute light control with patent pending production technology - LOW UGR

Fully controlled light beam distribution

Control of light emission and brightness into the entire space

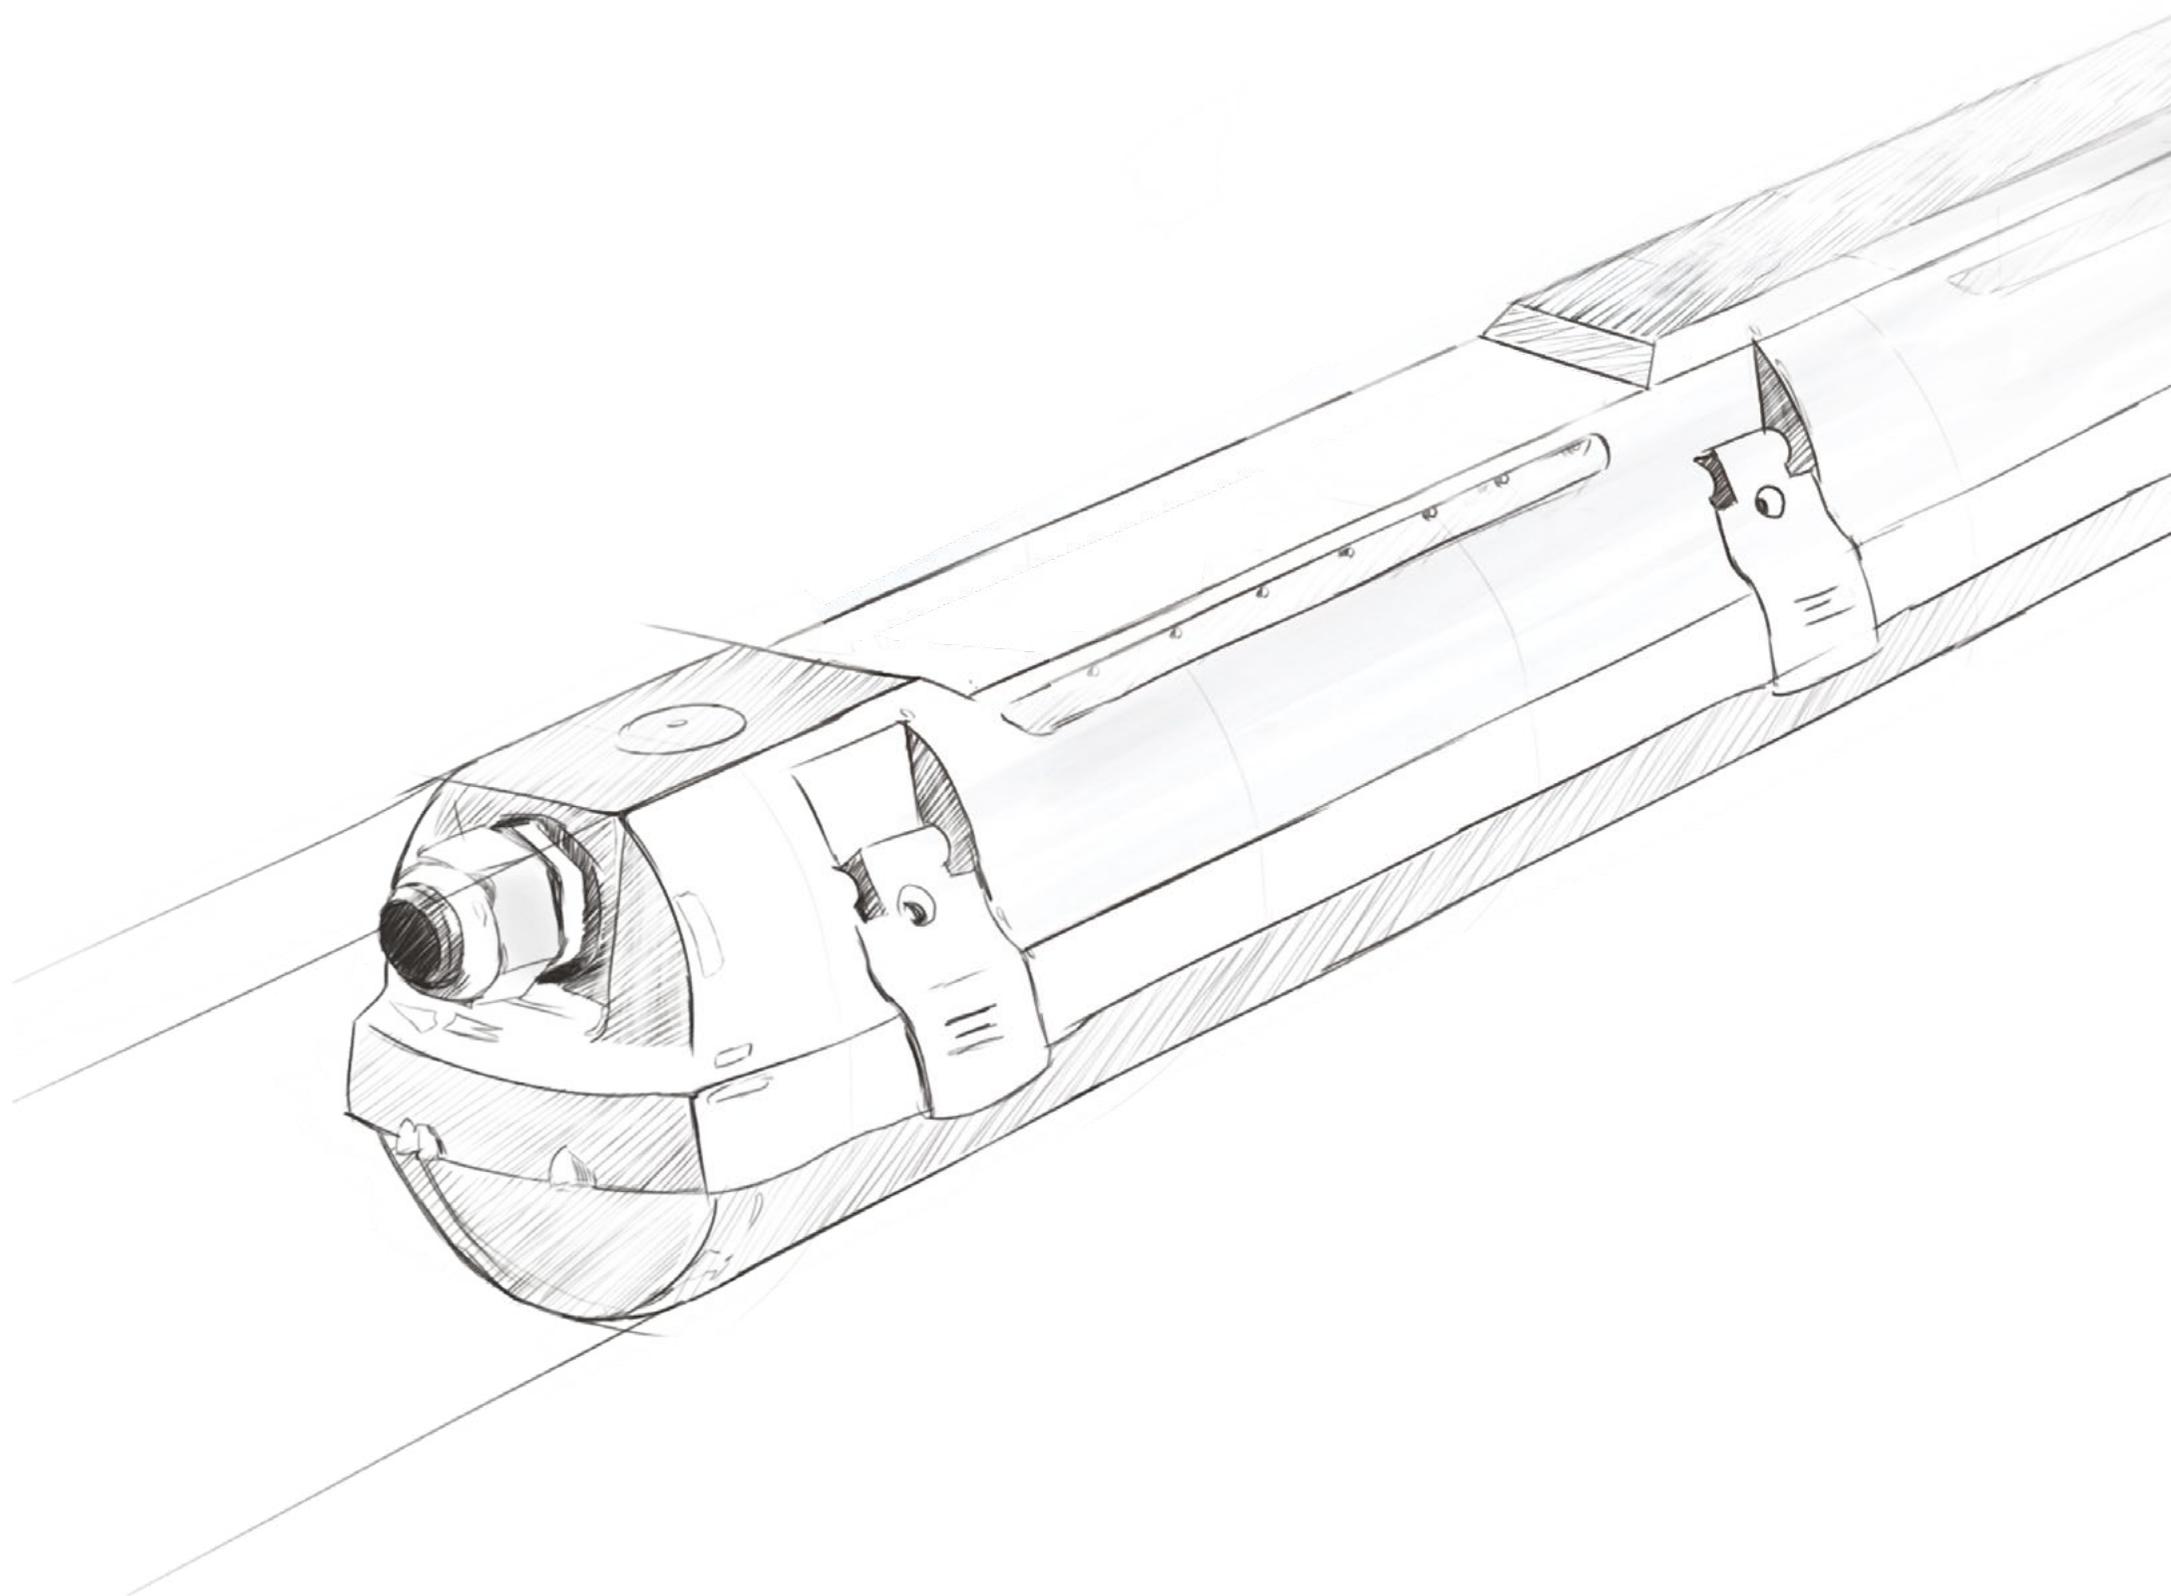

APPLICATIONS

SUPER EFFICIENCY with ENERGY SAVING solution:

INDUSTRY

ENGINEERING

PRODUCTION

CAR PARKS


HALLS AND LOGISTICS



APPLICATIONS

ANTI-GLARE with the low level of UGR:

**WORKSHOPS AND OTHER INDUSTRIAL
ENVIRONMENTS WITH THE MAXIMUM DETAIL
OF VISUAL PERFORMANCE**

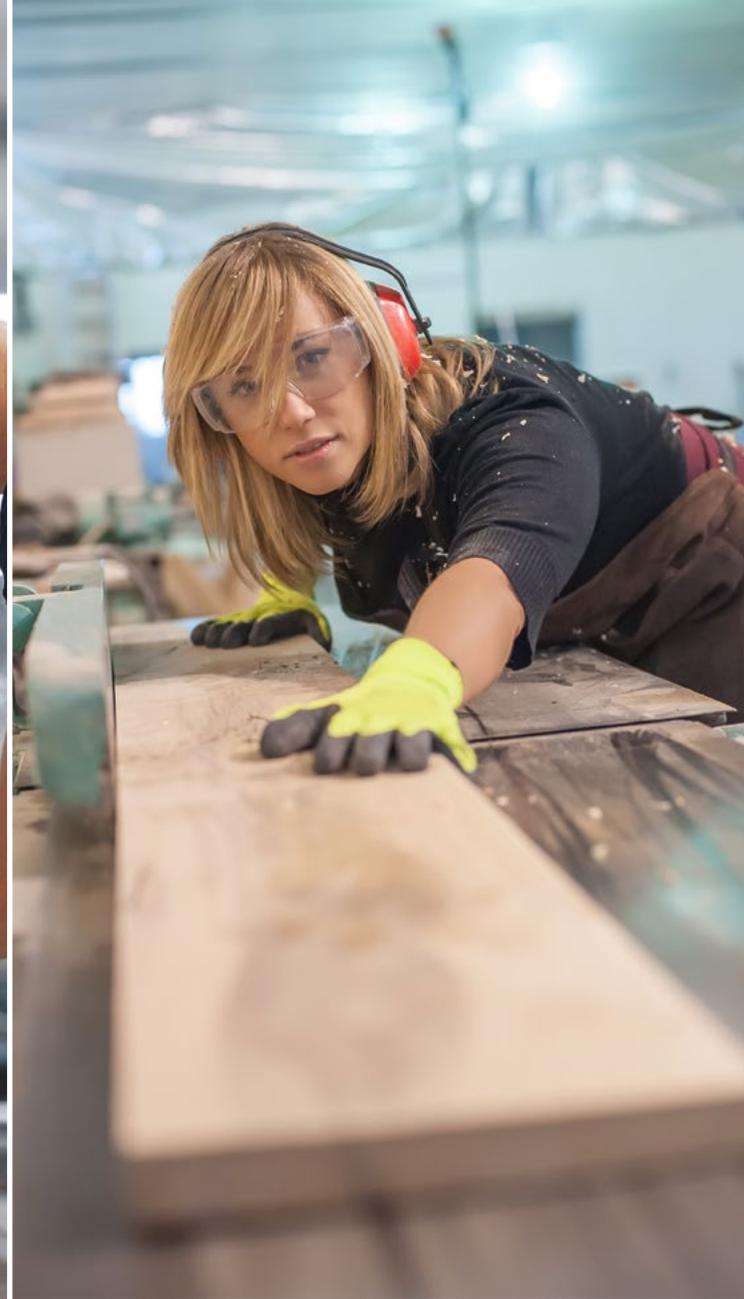

BENEFITS

Breakthrough optical system with perfect visual manifestation

Nanostructured surface

Fully controlled light beam distribution

Visual comfort

High visual performance

Work safety

Greater human productivity

IP66 / IP69 protection

IK10

EPD, ENEC, CB, DLG, HACCP

Three lengths

TYPE	CHARACTER		MATERIAL BODY/ MATERIAL DIFFUSER
NANOTTICA ES TRS	super efficiency and UGR	3,5 - 8 meters high ceilings	TRS PC/PC
NANOTTICA ES	super efficiency, energy saver	3,5 - 8 meters high ceilings	PC/PC
NANOTTICA TRS	super UGR, anti-glare	3,5 - 8 meters high ceilings	TRS PC/PC
NANOTTICA	basic	3,5 - 8 meters high ceilings	PC/PC
NANOTTICA NB	narrow beam	7,5 - 12 meter high ceilings	PC/PC
NANOTTICA WB	wide beam	2,5 - 4 meters low ceilings	PC/PC
NANOTTICA ES ABS	chemically resistant, super efficiency, energy saver	3,5 - 8 meters high ceilings	ABS/AC
NANOTTICA ABS	chemically resistant	3,5 - 8 meters high ceilings	ABS/AC
NANOTTICA NB ABS	narrow beam chemically resistant	7,5 - 12 meters high ceilings	ABS/AC
NANOTTICA WB ABS	wide beam, chemically resistant	2,5 - 4 meters low ceilings	ABS/AC
NANOTTICA VP	ventilation membrane, outdoor sheltered places	3,5 - 8 meters high ceilings	PC/PC
NANOTTICA VP ABS	ventilation membrane, outdoor sheltered places, chemically resistant	3,5 - 8 meters high ceilings	ABS/AC
NANOTTICA MAX	for extreme temperatures, -40 C + 65 C	3,5 - 8 meters high ceilings	PCc/PCc
NANOTTICA CLASS II	class II insulation	3,5 - 8 meters high ceilings	PC/PC
NANOTTICA SNS	with motion detector	3,5 - 6 meters high ceilings	PC/PC

THE BEST SOLUTIONS:

- a.** SUPER EFFICIENCY with LOW LEVEL of UGR (NANOTTICA ES TRS)
- b.** SUPER EFFICIENCY, energy saving solution (NANOTTICA ES)
- c.** LOW LEVEL of UGR, anti-glare (NANOTTICA TRS)

TECHNICAL FEATURES

Strong performance up to 180 lm/W

Photobiological safety group acc. to EN62778, RG 0

Service life 50 000 hours (L90B10)

Built-in ventilation membrane for minimization of internal condensation (NANOTTICA VP)

Temperature resistance up to -25 °C and +50 °C

MAX version up to -40 °C and +65 °C

Impact resistance of IK10

CRI > 80: 4000 K, 3000 K, 5000 K, 6500 K

CRI > 90: 3000 K, 4000 K, 5000 K, 6500 K





TECHNICAL FEATURES

ABSOLUTE LIGHTING CONTROL

NANOOPTIC DIFFUSER has the power to control the light out of the luminaire and gives anti-glare NANOOPTICS shields.

NANOTTICA LIGHTING BENEFITS

UGR down to 16

LED high-performance weather-proof lighting up to 180 lm/W


Uniform light – no dark ends

Ceilings installation options: pendant, surface mounted

IP66/IP69 – New solution for improved IP66 protection
(ventilation membrane on request, more clips)


NANOTTICA

Medium beam

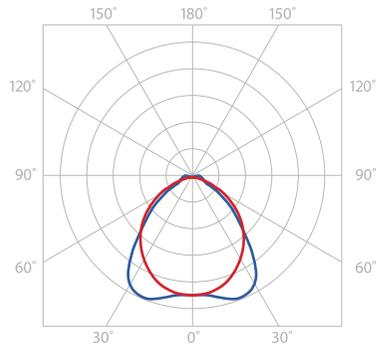


NANOTTICA NB

Narrow beam

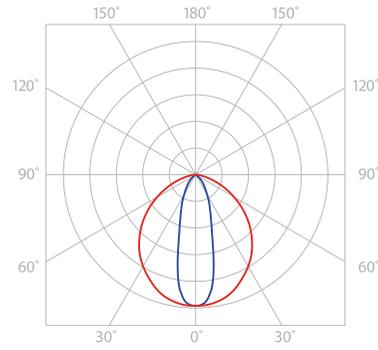

NANOTTICA WB

Wide beam

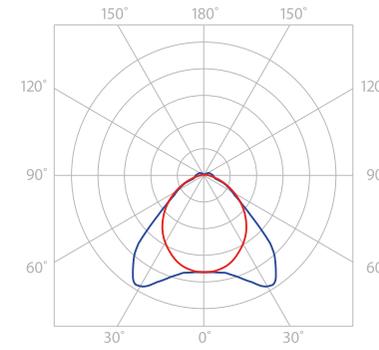


LOW discomfort glare index **UGR** down to 16

MEDIUM



NARROW

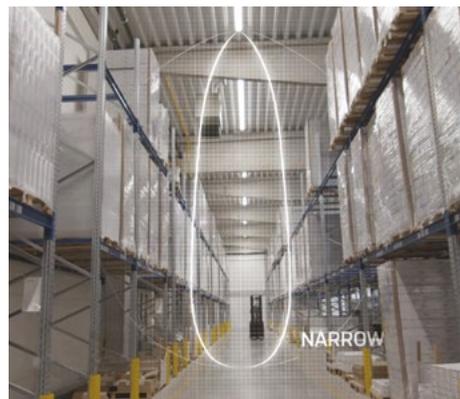

WIDE



MATERIALS

TRS PC/PC

Transparent (TRS) PC for low ceiling in indoor parking areas

PC/PC

PC for general usage and impact resistance

ABS/AC

ABS for chemically aggressive environments with ammonia, fat, oils, acids and alkalis

TRS
PC/PC




PC/PC



ABS/AC




MAXIMUM MOUNTING PITCH

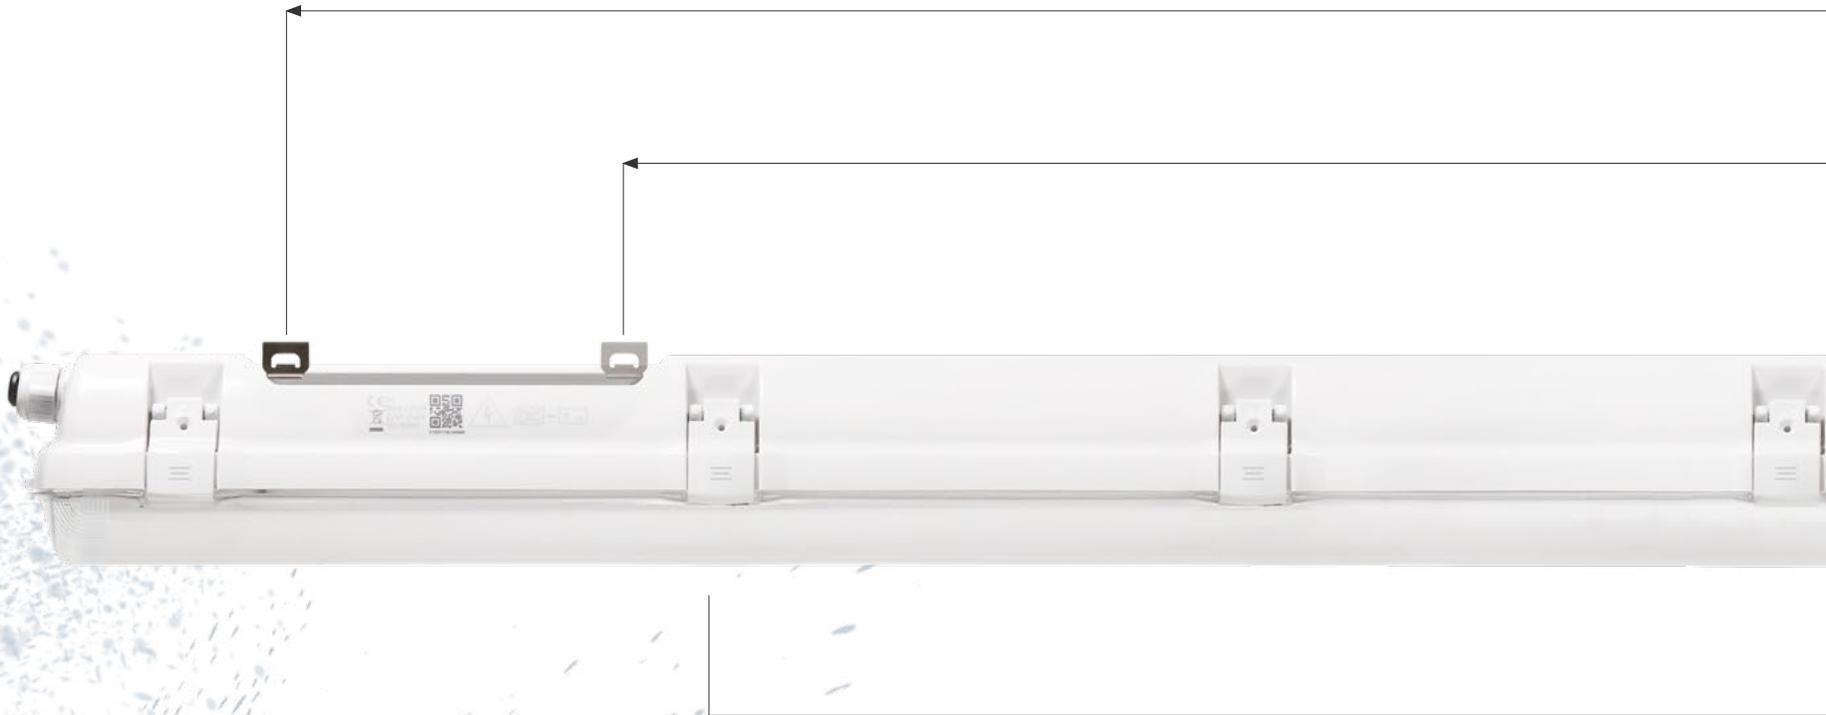

IP69

MINIMUM MOUNTING PITCH

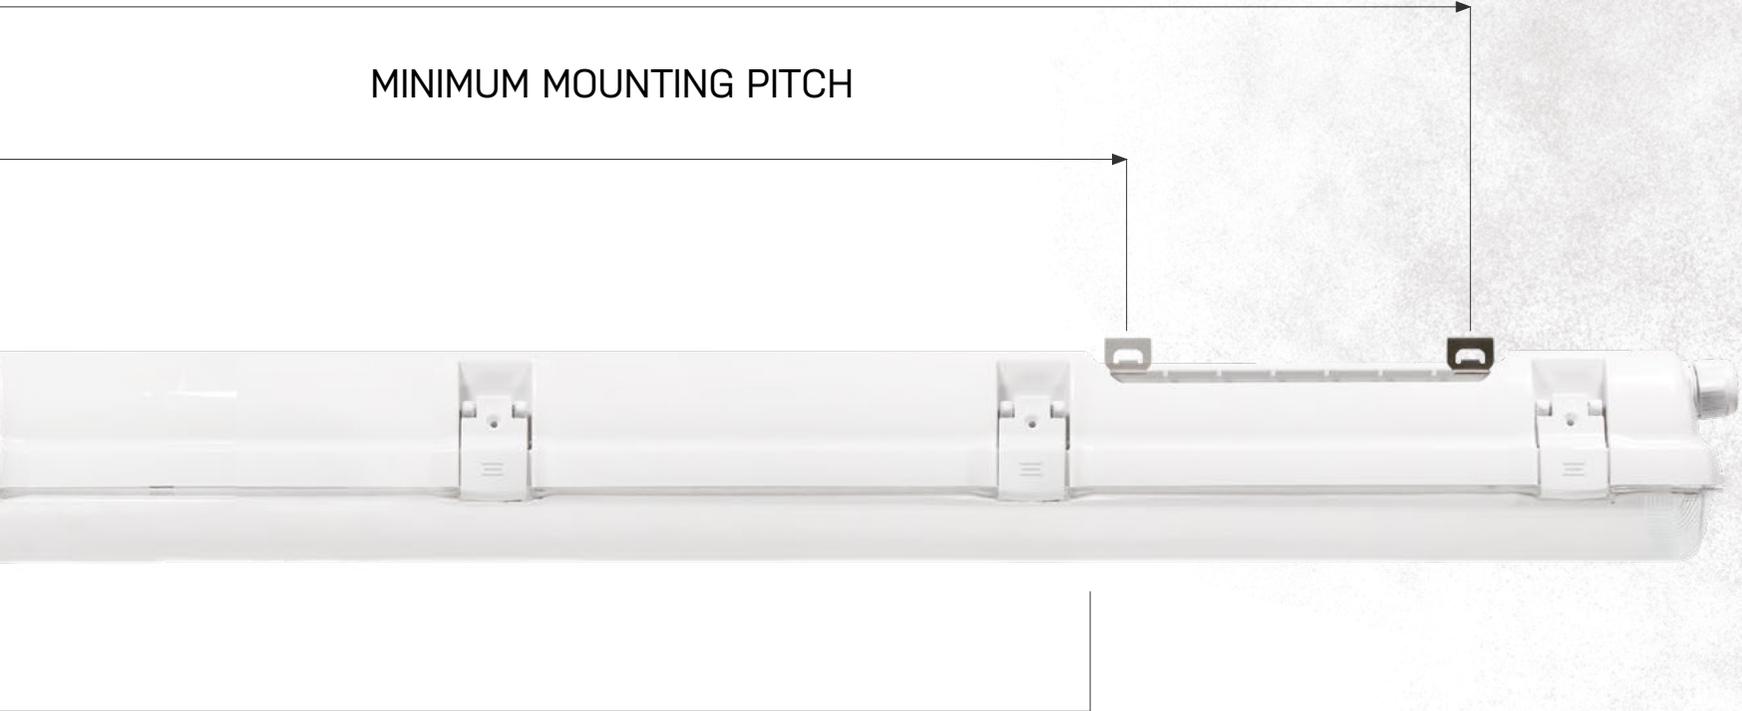

IP66

TEMPERATURE RESISTANCE

up to -25 °C and + 50 °C

-25 °C



-40 °C

+50 °C



+65 °C

MAX TEMPERATURE RESISTANCE
up to -40 °C and + 65 °C

TECHNICAL SPECIFICATIONS

Offer lighting fixtures in 3 different lengths
Plastic or stainless* clips

1.5ft = 14 pcs of clips


1.4ft = 12 pcs of clips

1.2ft = 6 pcs of clips




*




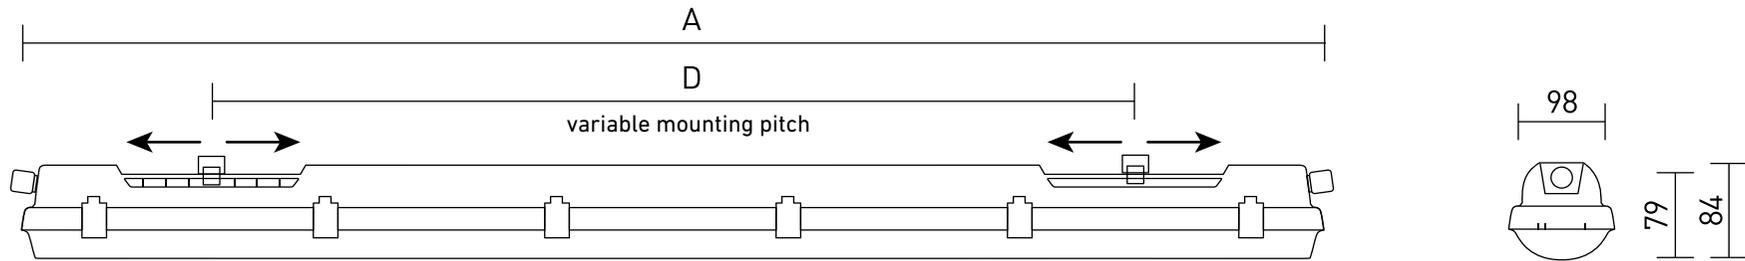

	A [mm]	D [mm]
NANOTTICA 1.2 ft	615	110 - 370
NANOTTICA 1.4 ft	1175	700 - 960
NANOTTICA 1.5 ft	1455	970 - 1230

THERE YOU CAN FIND **ACTUALLY**
PARAMITERS OF LUMINAIRES

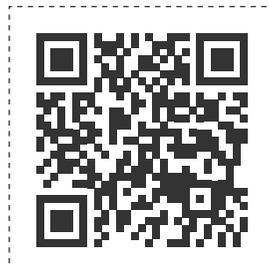

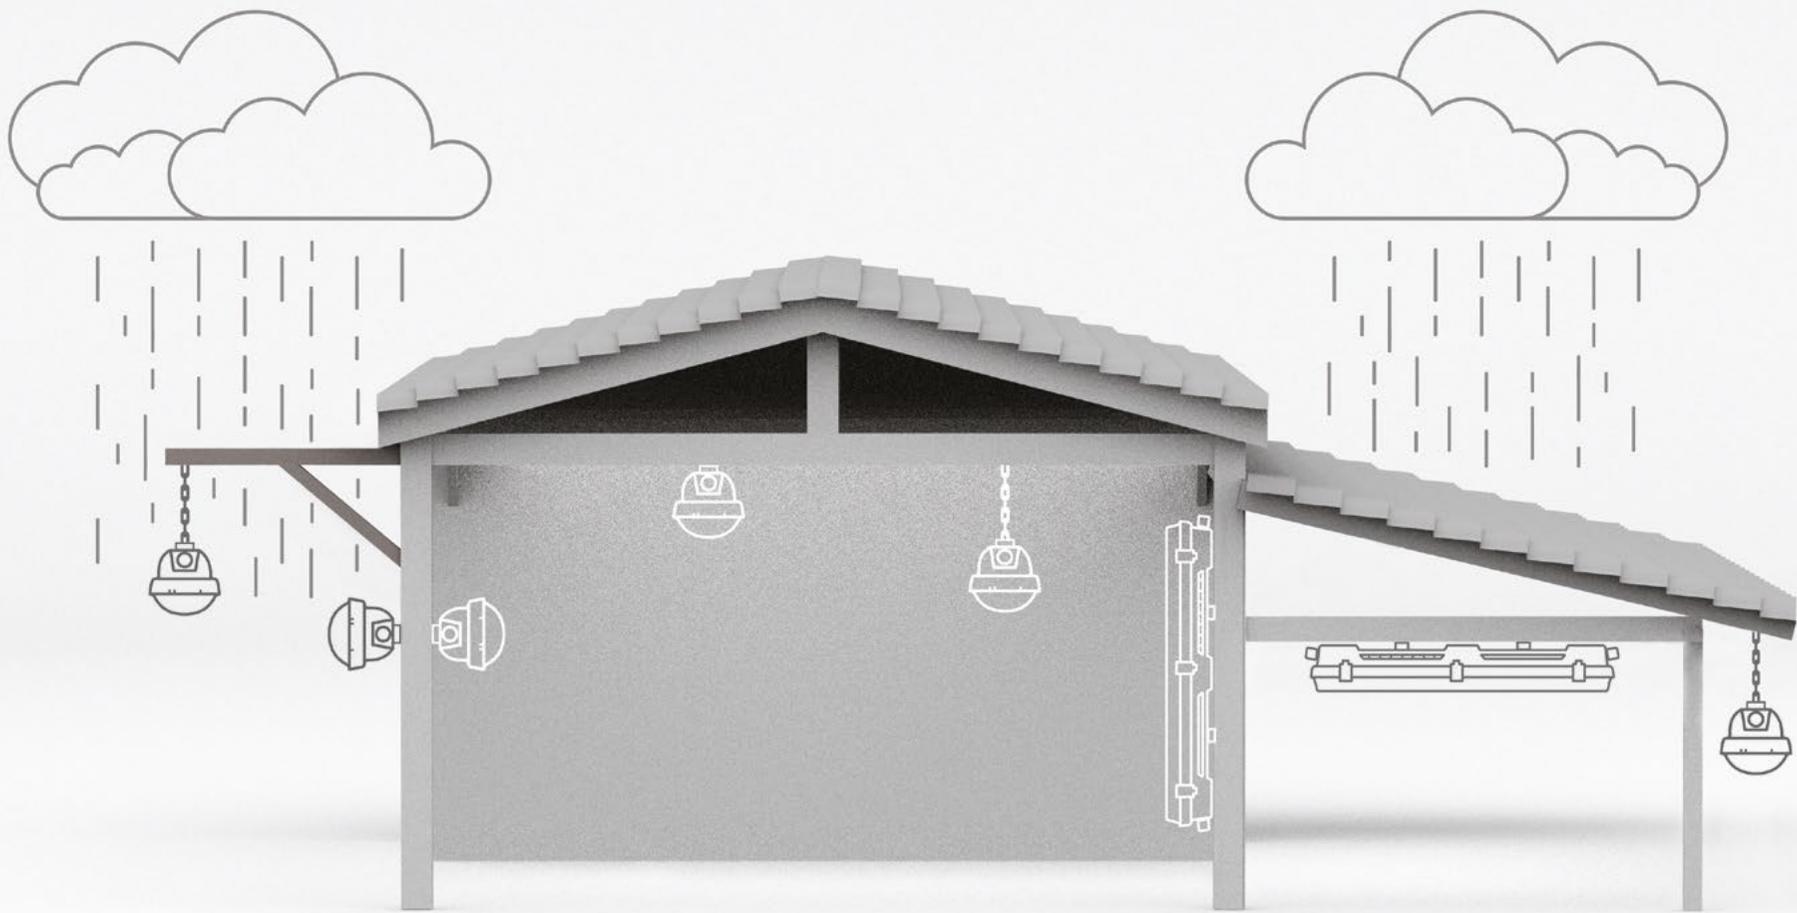

NANOITICA

TRE≡VOS, a.s.
Nova Ves 34
511 01 Turnov
Czech Republic

Email: trevos@trevos.cz

7/2023



www.trevos.eu